


PIONEER RollRight II Doors

Pioneer 300RR II Doors Are High Performance Vinyl and Mesh Roll-Up Doors . Great for Loading Docks, Food Packaging and Processing Facilities, Process Areas, Waste Areas and More!




Mounting Options

Mounts to Outside to the Face of the Building



Face Mount

Mount Inside the Building Beyond the Existing Security Door

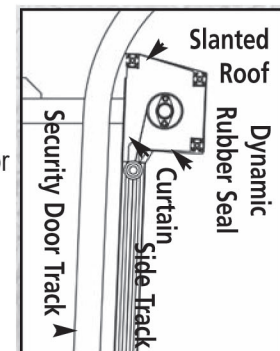

Projection Mount

- ❖ Opening Speeds up to 36" Per Second
- ❖ 45 mph Wind Load Rated*
- ❖ Available in Both Manual & Motorized Operations
- ❖ Fiberglass Windbars (Won't Bend or Break)
- ❖ Exchangeable Panels Available in Mesh, Clear & Solid Vinyl for Multi-Seasonal Use
- ❖ Meets NFPA-701 & CSFM Standards for Flame Retardancy
- ❖ Fabric Resistant to Tearing, Ultraviolet Rays, Rot, and Mildew

*Wind Load Tested on a 10' x 12' Solid Vinyl Door



1-866-753-2655
www.pioneerindustrialdoor.com


Standard & Safety Features on RR II Doors

- ❖ Auto Reset
- ❖ Door Automatically Reverses if Beam Photo Eye is Broken
- ❖ Custom Extruded Aluminum Side Beams
- ❖ Extruded PVC Side Seals Ensures a Tight Seal Along Vertical Edges
- ❖ Welded Seams for Strength & Durability
- ❖ Slanted Upper Box Allows for Water Run Off


18 oz. Vinyl Roll Door Colors



Mesh Door Colors

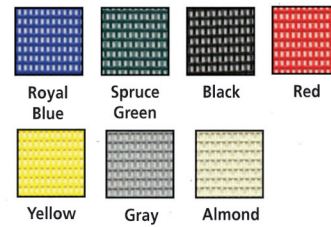

Operation Options

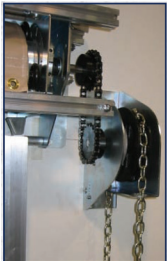

Manual Chain Hoist
Manual Open and Close with a Chain Hoist Mechanism



Harsh Environment Motor - 28" per second opening speed, 24/40*70** Cycles per Hour, Manual Crank Override in Case of Power Failure



In-Tube Motor - 18" per second opening speed, 24/40*Cycle Per Hour



High Speed Motor - 36" per second opening speed, 160 Cycles per Hour, Chain Hoist Override in Case of Power Failure

All RollRight Motors are 110 Volt Operation

*With high duty cycle upgrade
**With high duty cycle and fan kit upgrade

